

PHOENIX SYSTEM

The Phoenix Ultra High-purity Lab Water System from Aries FilterWorks delivers Type I, 18.2 Megohm water quality on demand. The water is purified using a staged purification process which includes high-purity ion exchange resins to remove dissolved minerals and internal recirculation to maintain purity. As the water exits the system, a final filter removes particulates and bacteria to reach Type I water specifications. Additional technologies are offered depending on the application, including UV and Ultrafiltration. Multiple sensors continuously monitor the system and final water quality to ensure trouble free operation.





FEATURES & BENEFITS

- 2.5 LPM* OF 18 MEGOHM TYPE 1 REAGENT WATER ON DEMAND
- INTUITIVE, USER FRIENDLY TOUCH-SCREEN INTERFACE
- REAL TIME QUALITY MONITORING WITH LEAK DETECTION
- COMPACT DESIGN WITH REMOTE DISPENSE OPTION
- QUICK CHANGE, NO TOOLS CARTRIDGE DESIGN
- LARGE CAPACITY, LOW COST CONSUMABLES CARTRIDGES
- GENUINE RESINTECH MEDIA

*Note: Reported flow rate is typical but can vary depending on supply pressure and system options.

FLOW DIAGRAM

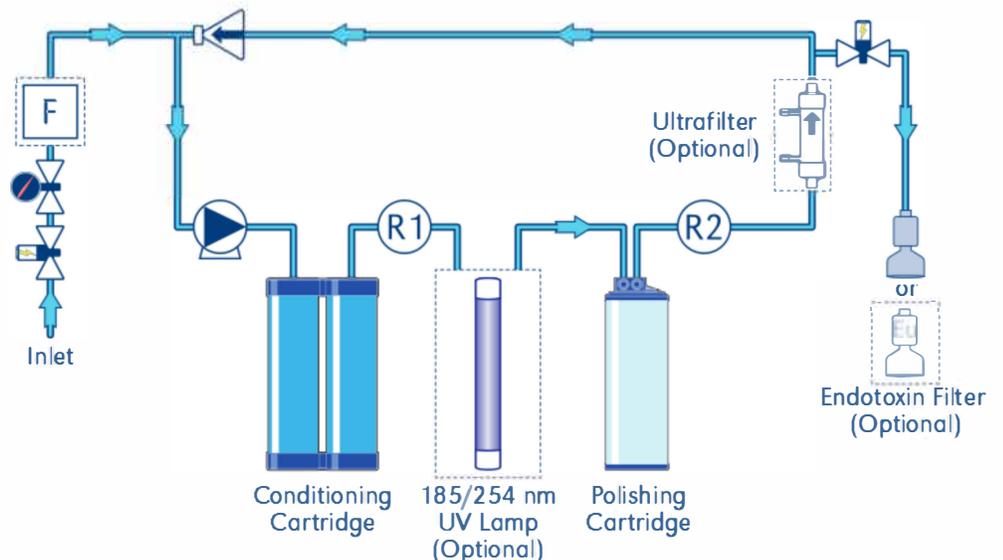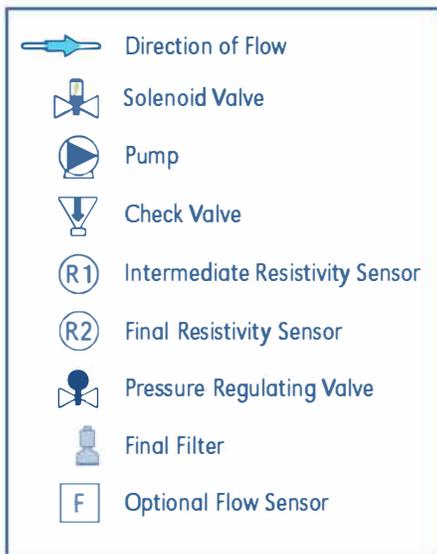

PHOENIX ULTRA HIGH-PURITY WATER SYSTEM

PHOENIX CONFIGURATIONS

Model	Academy	Citation	Biochem	Genome
				
Applications	Basic Chemistry, Academic, IC Buffers	HPLC, GC/MS, Trace Organics	Life Science, Cell Culture, Microbiology	DNA Sequencing, PCR, Electrophoresis
Conditioning Cartridge	•	•	•	•
Polishing Cartridge	•	•	•	•
UV Oxidation		•		•
Ultrafiltration			•	•
0.2 micron	•	•	•	•

PERFORMANCE SPECIFICATIONS*

Resistivity	18.2 MΩ-cm	18.2 MΩ-cm	18.2 MΩ-cm	18.2 MΩ-cm
Bacteria	< 1 cfu/ml	< 1 cfu/ml	< 1 cfu/ml	< 1 cfu/ml
Endotoxin**			<0.005 EU/ml	<0.005 EU/ml
Particulates	< 0.2 µm filtration	< 0.2 µm filtration	< 0.05 µm filtration	< 0.05 µm filtration
TOC	< 15 ppb	< 5 ppb	< 15 ppb	< 5 ppb
RNase			< 0.01 ng/ml	< 0.01 ng/ml
DNase			< 4 pg/µl	< 4 pg/µl

* Performance based upon RO / DI or Distillation Feed (< 20 uS/cm, < 50 ppb of TOC, 0.2 micron filtration)

** Includes Endotoxin Removal Capsule Filter

ADDITIONAL SYSTEM COMPONENTS

Installed Options & Accessories†

PHA-FM	Flow Totalizer Meter
PHA-DF	Direct Feed Port
PHA-DG	Recirculating Dispensing Gun
PHA-WB	Phoenix Wall Mount Bracket

Cartridges & Filters††

PX-13-5001	Phoenix Dual Conditioning Cartridge (RO Feed)
PX-13-5002	Phoenix Dual Conditioning Cartridge (SDI / TAP Feed)
PX-11-5103	Phoenix Polishing Ultrapure Cartridge
PX-11-5104	Phoenix Polishing Ultrapure Low Organics Cartridge
PF-00-6402	0.2 Micron Capsule Filter - 1/4" MNPT x 1/4" hose barb
PF-00-7101	0.2 Micron Endotoxin Removal Capsule Filter - 1/4" MNPT x 1/4" hose barb

Consumables

PF-00-7105	Phoenix Ultrafilter - 3/8" Quick Disconnect Fitting
HPA-016	Phoenix UV Bulb 254/185nm TOC Destruct
HPA-017	Sanitization Kit (includes cartridges, test strips, and gloves)

† Options must be preordered for factory installation

†† Cartridges and Filters are not included in a system and are ordered separately

Note: Ordering information subject to change without notice. Please verify all specifications prior to placing orders. For more information Call: (919) 577-1178

IMPORTANT NOTICE TO USER:

The following is made in lieu of all other warranties expressed or implied. Manufacturer's and Seller's only obligation shall be to give credit against the purchase or replacement of the equipment proved to be defective in material or workmanship. Neither Manufacturer nor Seller shall be liable for any injury, loss or damage, direct or indirect, special or consequential, arising out of the use of, misuse, or the inability to use such product. The information contained herein is based on technical data and tests which we believe to be reliable and is intended for use by persons having technical skill at their discretion and risk. Since conditions of use are outside ResinTech's control, we can assume no liability whatsoever for results obtained or damages incurred through the application of the data presented. This information is not intended as a license to operate under, or a recommendation to infringe upon, any patent of ResinTech's or others covering any material or use. The foregoing may not be altered except by written agreement signed by officers of the manufacturer.

DS-Phoenix (rev 2.0)