



A SMALL SOFTENER WITH A BIG IMPACT

Compact enough to fit in areas with limited space such as boats, RV's, condos and apartments. This softener is a low-maintenance powerhouse. Save time and money with built-in salt and water-saving technology. Hague Quality Water's patented packed mineral bed eliminates the need for a bulky water treatment system.

The perfect companion for your hot water heater, the Homeguard will soften water as it enters your home to keep your plumbing scale-free and your water heater performing as efficiently as it did on day one. You'll enjoy the benefits throughout your home as soft water keeps your home and family looking and feeling their best.



Reduces Scale Buildup
Fixtures Stay Cleaner



Softer Skin and Hair
Retains Moisture Better



Fabrics Stay Bold
Soaps Wash Away Easier




Extend Life of Appliances
Reduces Mineral Build-Up

HomeGUARD™

THE MOST COMPACT WATER TREATMENT SYSTEM

- ① **DIGITAL CONTROLLER:** Operates in three languages and retains cycle settings, even through power outages (up to 7 days).
- ② **BYPASS VALVE:** Simply turn the dial to BYPASS so water does not enter the appliance. To return the appliance to service, simply turn the dial to the SERVICE position.
- ③ **BUILT-IN SELF CLEANING FILTER:** Filters dirt and sediment smaller than the human eye can see. There's never any cartridges to change and no maintenance is required.
- ④ **SAFETY SHUT-OFF SYSTEM:** Helps to prevent the possibility of overflows.
- ⑤ **FINE MESH RESIN:** Patented mineral tank allows vacuum packed resin to provide a lot of softening power in a small space, eliminating the need for a 2nd tank.
- ⑥ **GRID PLATE:** The grid plate in the salt storage compartment provides a dedicated compartment to ensure consistent brine concentration.

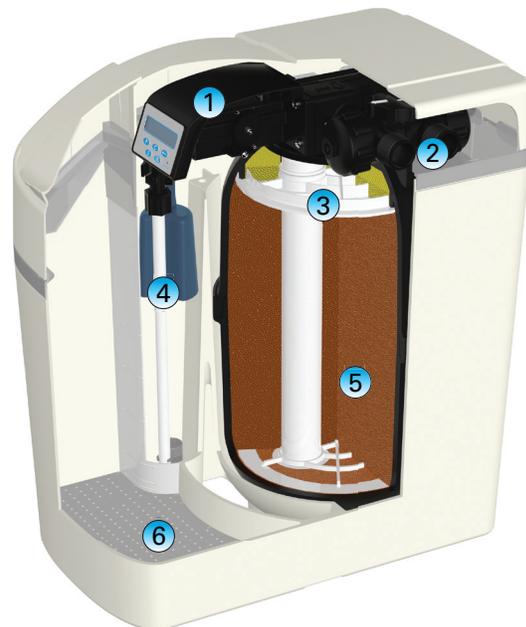

Made In  USA



HOMEGUARD™ 410

Max Compensated Hardness	35 gpg (600mg/L)
Max Ferrous Iron Reduction	3 ppm
Media Type and Amounts	Chlorostat (2.0 lb) Filter Media (1.5 lb) Fine Mesh Resin 0.4 cu. ft (11.3 L)
Salt Usage/Capacity: #1 Setting	1 lb/5,200 grains (0.5 kg/365 grams)
#2 Setting	2 lb/8,300 grains (0.9 kg/540 grams)
#3 Setting	3 lb/10,400 grains (1.4 kg/670 grams)
Minimum pH	7
Flow Rate @ 15 psi (1.0 bar) drop	6.0 gpm (22.7 L/min)
Flow Rate @ 25 psi (1.7 bar) drop	8.7 gpm (32.9 L/min)
Plumbing Connections	¾"-1" Male (MNPT)
Salt Storage Capacity	30 lbs (13.6 kg)
Electrical Requirements	115 V, 60 Hz/220VAC, 50Hz
Min/Max. Water Temperature	40-120° F (4-49° C)
Water Pressure	20-120 psi (1.4-8.3 bar)
Dimensions	11½"W x 21"H x 18½"D



PUROLOGIX™
WATER SERVICES, INC.

Factory Offices:

105 Technical Ct., Garner, NC 27529

Ph: 919-577-1178 * 877-COLD-H2O (265-3426) * www.purologix.com

"Specializing in Residential, Commercial, and Industrial Process & Reuse Water Filtration, and Disinfection"